


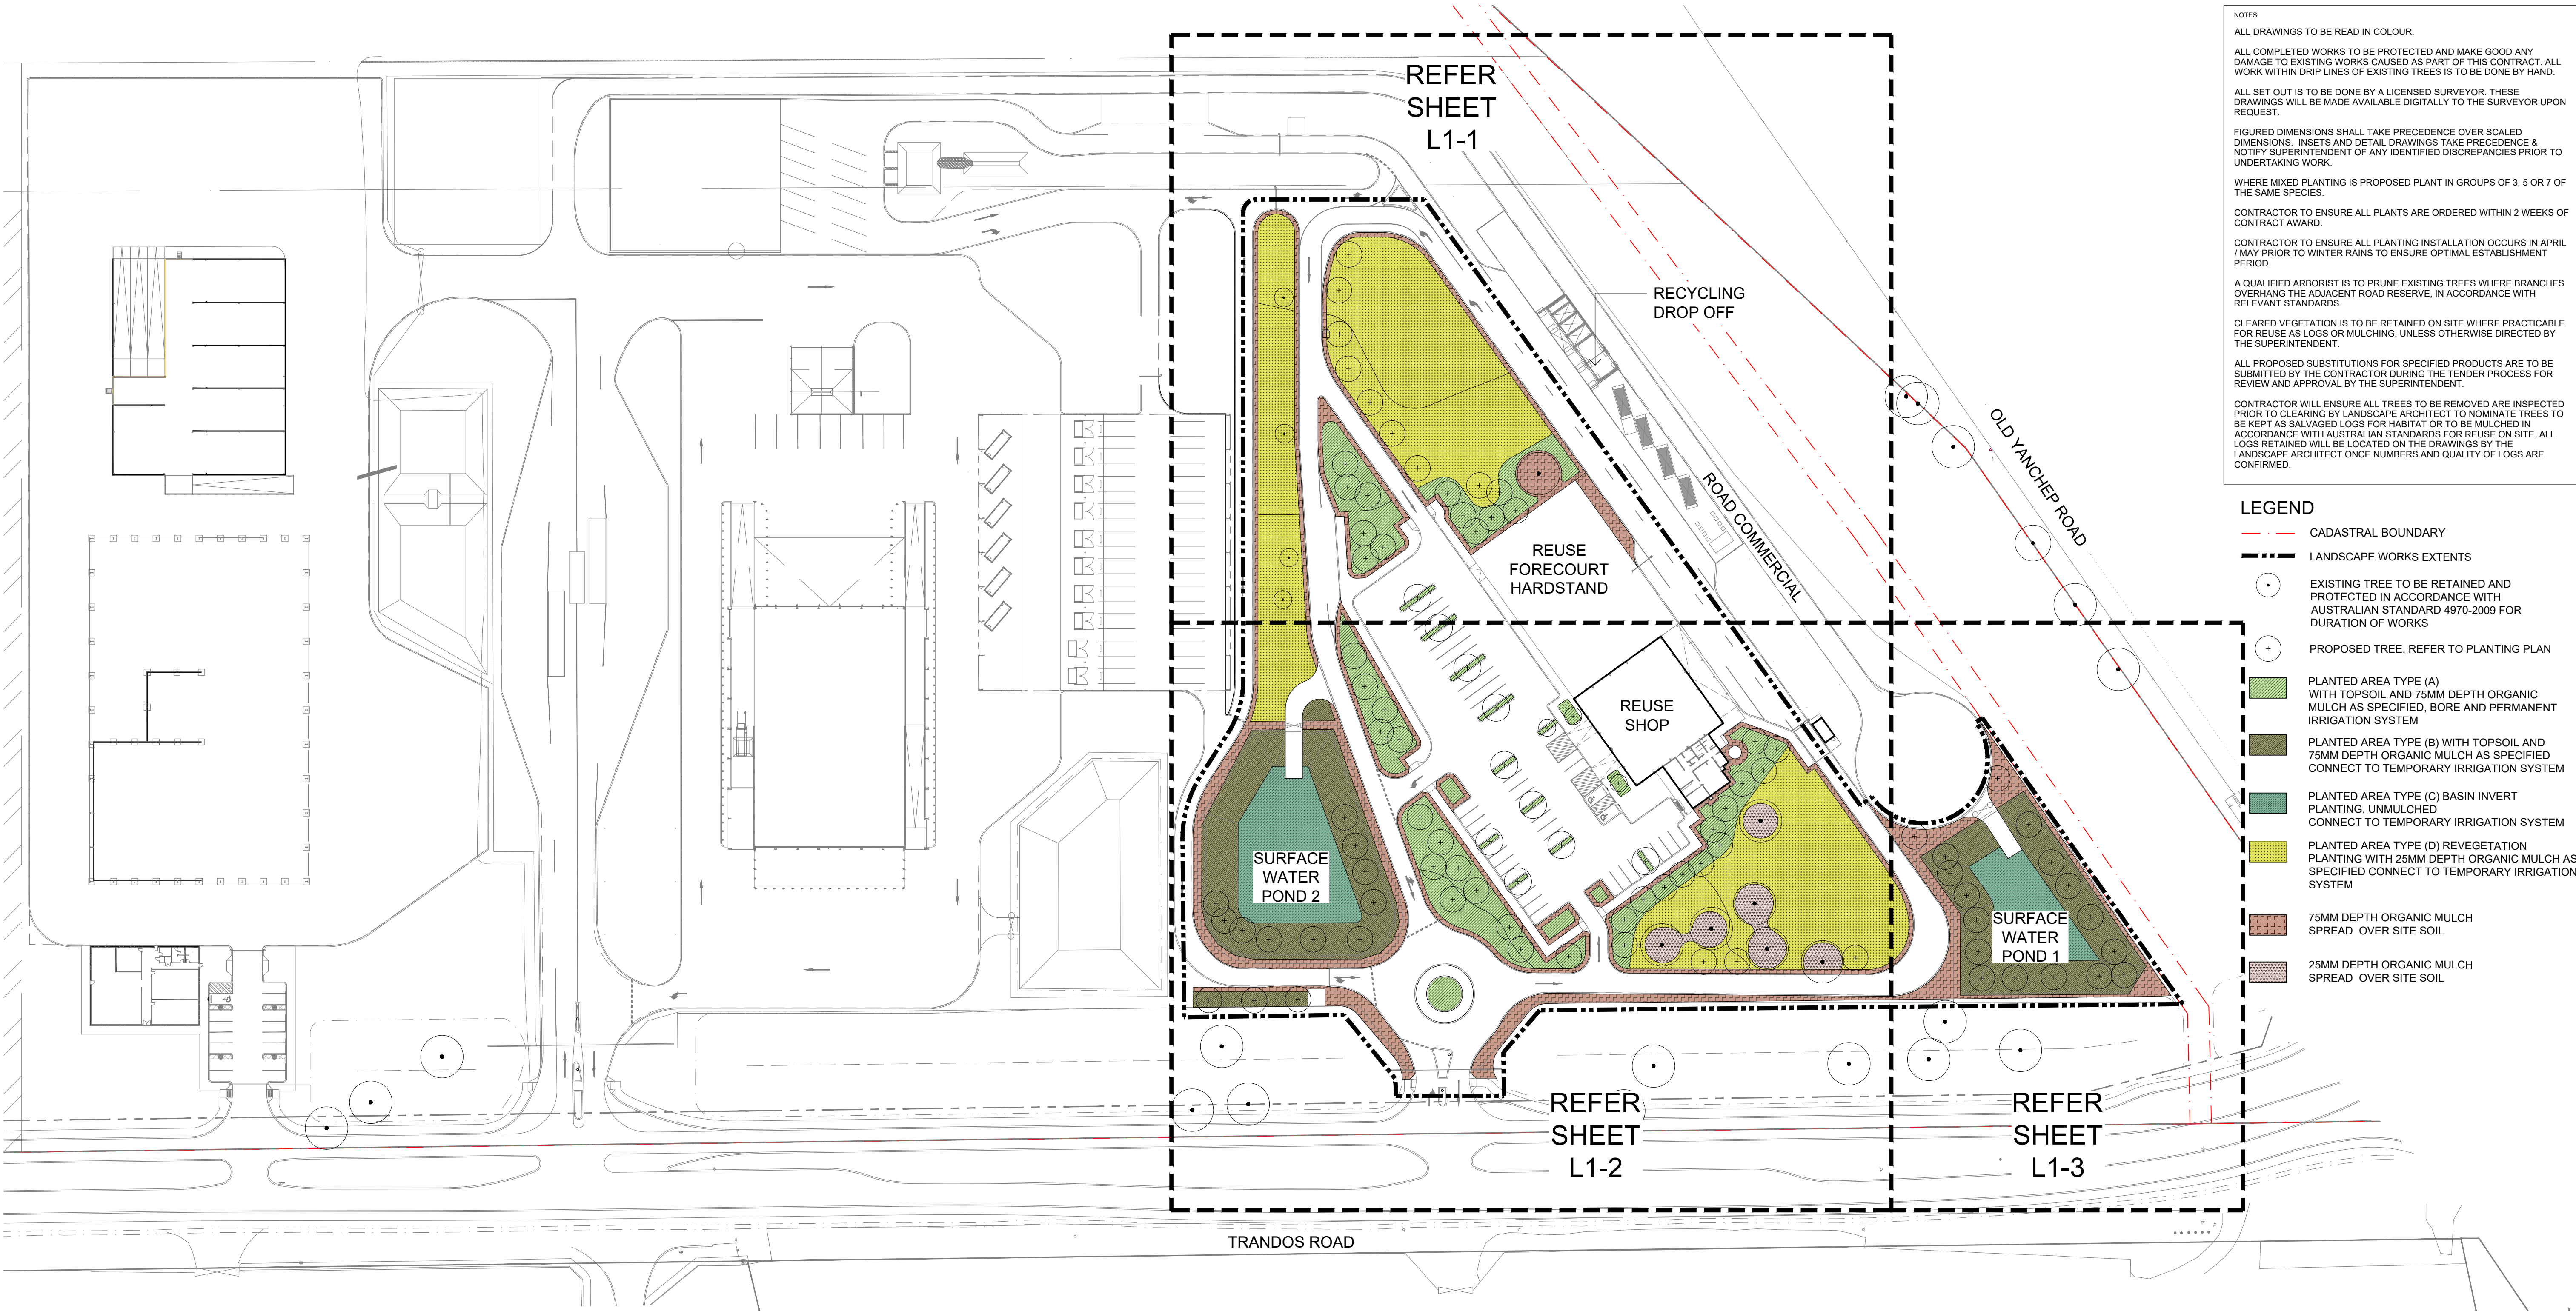

NEERABUP RESOURCE RECOVERY PRECINCT

LANDSCAPE ARCHITECTURAL DRAWINGS

DETAILED DESIGN


DRAWING SCHEDULE


DWG No.	SHEET NAME	SCALE @ A1	REV
L0-1	COVER SHEET	1:750	F
L1-1	PLANTING PLAN	1:250	F
L1-2	PLANTING PLAN	1:250	F
L1-3	PLANTING PLAN	1:250	F
L2-1	CONSTRUCTION DETAILS	AS SHOWN	F

NOT FOR CONSTRUCTION

F	31/03/2026	100% DETAILED DESIGN
E	20/02/2026	90% UPDATED DESIGN
D	19/12/2025	90% DETAILED DESIGN
C	26/11/2025	COORDINATION ISSUE
B	31/10/2025	COORDINATION ISSUE
A	03/10/2025	CONCEPT

REV	DATE	ISSUE	NORTH 1
ecoscape L1, 38 Adelaide Street, Fremantle (Waplog) WA 6160 (08) 9430 8955 www.ecoscape.com.au			
PROJECT NEERABUP RESOURCE RECOVERY PRECINCT			
CLIENT TAILS CONSULTANTS		PROJECT STAGE DETAILED DESIGN	
DESIGNED FK	DRAWN DT	CHECKED FK	PROJECT No. 5133-25
DRAWING TITLE COVER SHEET			ORG. SIZE A1

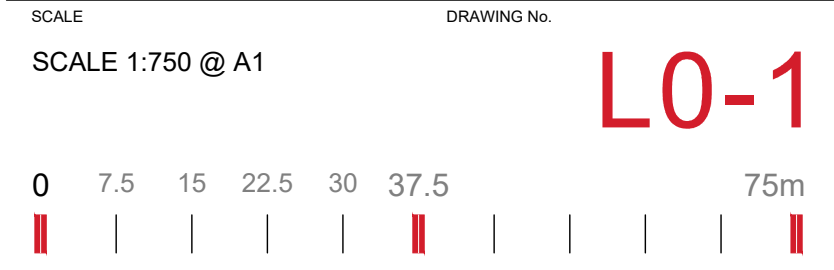

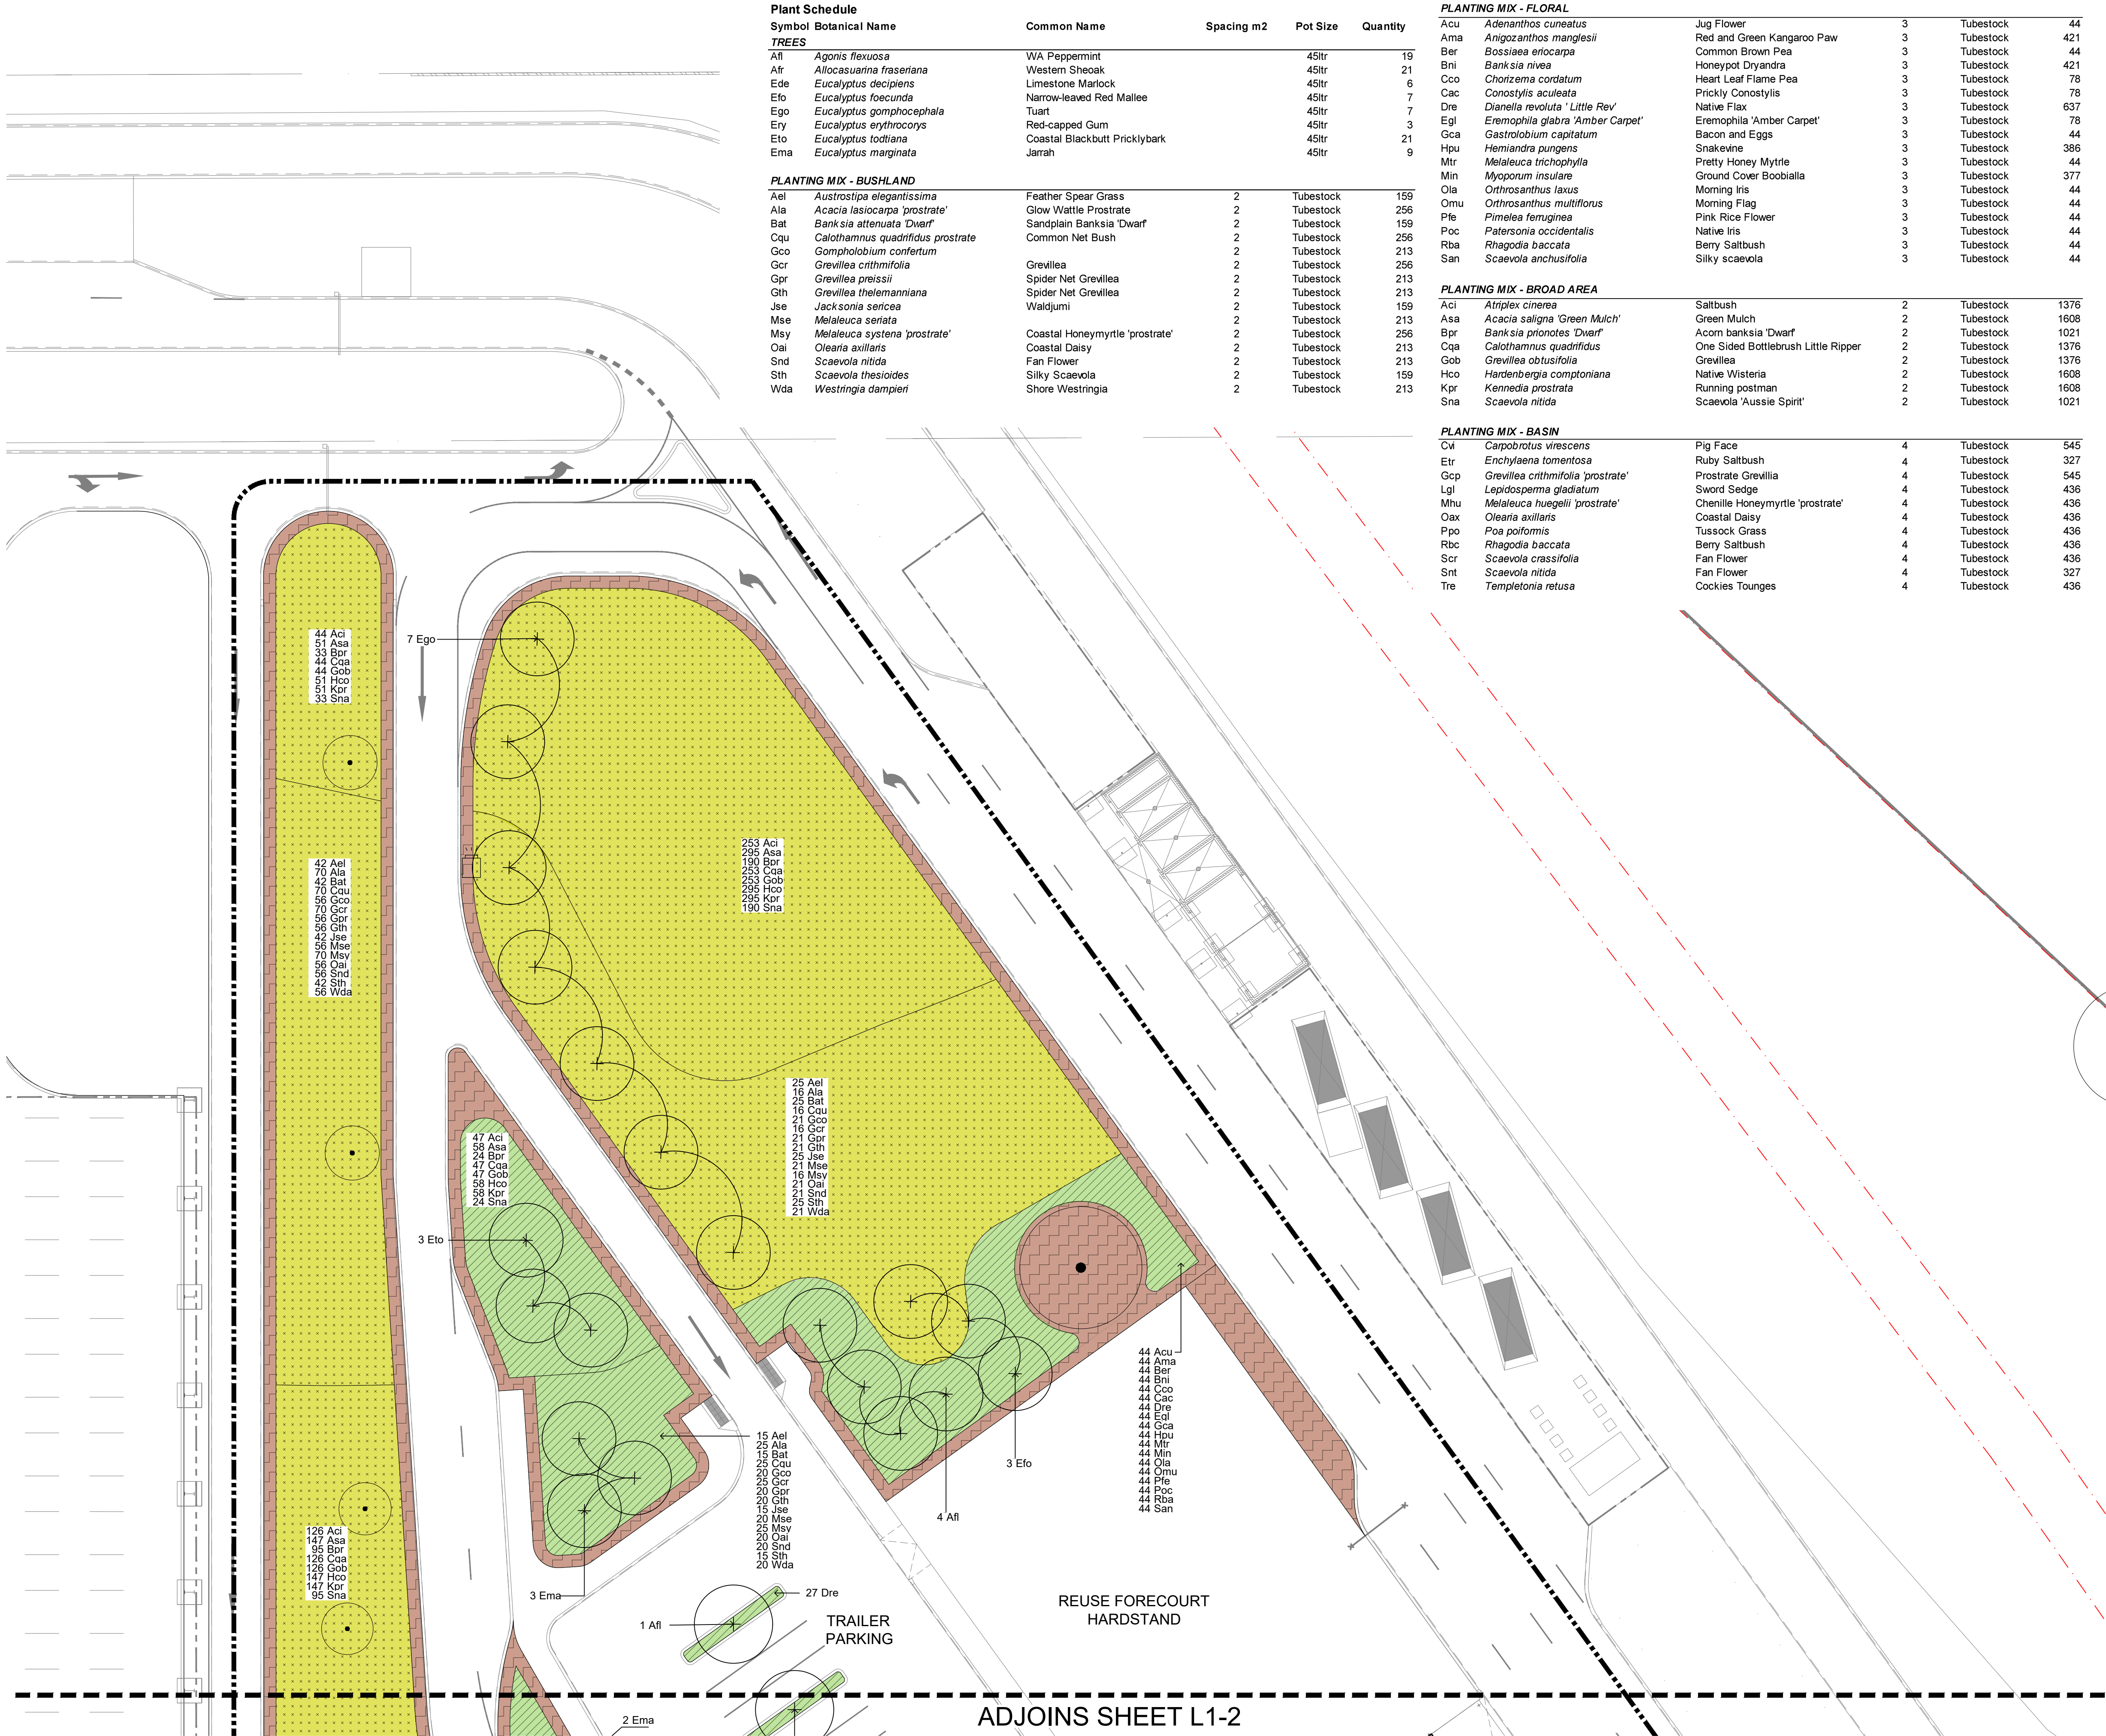

Plant Schedule					
Symbol	Botanical Name	Common Name	Spacing m2	Pot Size	Quantity
TREES					
Afl	Agonis flexuosa	WA Peppermint		45ltr	19
Afr	Allocasuarina fraseriana	Western Sheoak		45ltr	21
Ede	Eucalyptus decipiens	Limestone Marlock		45ltr	6
Efo	Eucalyptus foecunda	Narrow-leaved Red Mallee		45ltr	7
Ego	Eucalyptus gomphocephala	Tuart		45ltr	7
Ery	Eucalyptus erythrocorys	Red-capped Gum		45ltr	3
Eto	Eucalyptus todiana	Coastal Blackbutt Pricklybark		45ltr	21
Ema	Eucalyptus marginata	Jarrah		45ltr	9
PLANTING MIX - BUSHLAND					
Ael	Austrostipa elegantissima	Feather Spear Grass	2	Tubestock	159
Ala	Acacia lasiocarpa 'prostrate'	Glow Wattle Prostrate	2	Tubestock	256
Bat	Banksia attenuata 'Dwarf'	Sandplain Banksia 'Dwarf'	2	Tubestock	159
Cqu	Calothamnus quadrifidus prostratus	Common Net Bush	2	Tubestock	256
Gco	Gompholobium confertum		2	Tubestock	213
Gcr	Grevillea crithmifolia	Grevillea	2	Tubestock	256
Gpr	Grevillea preissii	Spider Net Grevillea	2	Tubestock	213
Gth	Grevillea thelemanniana	Spider Net Grevillea	2	Tubestock	213
Jse	Jacksonia sericea	Waldjumi	2	Tubestock	159
Mse	Melaleuca seriata		2	Tubestock	213
Msy	Melaleuca systena 'prostrate'	Coastal Honeymyrtle 'prostrate'	2	Tubestock	256
Oai	Olearia axillaris	Coastal Daisy	2	Tubestock	213
Snd	Scaevola nitida	Fan Flower	2	Tubestock	213
Sth	Scaevola thesioides	Silky Scaevola	2	Tubestock	159
Wda	Westringia dampieri	Shore Westringia	2	Tubestock	213

PLANTING MIX - FLORAL					
Acu	Adenanthos cuneatus	Jug Flower	3	Tubestock	44
Ama	Anigozanthos manglesii	Red and Green Kangaroo Paw	3	Tubestock	421
Ber	Bossiaea enocarpa	Common Brown Pea	3	Tubestock	44
Bni	Banksia nivea	Honeypot Dryandra	3	Tubestock	421
Cco	Chorizema cordatum	Heart Leaf Flame Pea	3	Tubestock	78
Cac	Conostylis aculeata	Prickly Conostylis	3	Tubestock	78
Dre	Dianella revoluta 'Little Rev'	Native Flax	3	Tubestock	637
Egl	Eremophila glabra 'Amber Carpet'	Eremophila 'Amber Carpet'	3	Tubestock	78
Gca	Gastrolobium capitatum	Bacon and Eggs	3	Tubestock	44
Hpu	Hemidra pungens	Snakevine	3	Tubestock	386
Mtr	Melaleuca trichophylla	Pretty Honey Myrtle	3	Tubestock	44
Min	Myoporum insulare	Ground Cover Boobialla	3	Tubestock	377
Oia	Orthrosanthus laxus	Morning Iris	3	Tubestock	44
Omu	Orthrosanthus multiflorus	Morning Flag	3	Tubestock	44
Ple	Pimelea ferruginea	Pink Rice Flower	3	Tubestock	44
Poc	Patersonia occidentalis	Native Iris	3	Tubestock	44
Rba	Rhagodia baccata	Berry Saltbush	3	Tubestock	44
San	Scaevola anchusifolia	Silky scaevola	3	Tubestock	44

PLANTING MIX - BROAD AREA					
AcI	Atriplex cinerea	Saltbush	2	Tubestock	1376
Asa	Acacia saligna 'Green Mulch'	Green Mulch	2	Tubestock	1608
Bpr	Banksia prionotes 'Dwarf'	Acorn banksia 'Dwarf'	2	Tubestock	1021
Cqa	Calothamnus quadrifidus	One Sided Bottlebrush Little Ripper	2	Tubestock	1376
Gob	Grevillea obtusifolia	Grevillea	2	Tubestock	1376
Hco	Hardenbergia comptoniana	Native Wisteria	2	Tubestock	1608
Kpr	Kennedia prostrata	Running postman	2	Tubestock	1608
Sna	Scaevola nitida	Scaevola 'Aussie Spirit'	2	Tubestock	1021

PLANTING MIX - BASIN					
Cvi	Carpobrotus virescens	Pig Face	4	Tubestock	545
Etr	Enchylaena tomentosa	Ruby Saltbush	4	Tubestock	327
Gcp	Grevillea crithmifolia 'prostrate'	Prostrate Grevillia	4	Tubestock	545
Lgl	Lepidosperma gladiatum	Sword Sedge	4	Tubestock	436
Mhu	Melaleuca huegelii 'prostrate'	Chenille Honeymyrtle 'prostrate'	4	Tubestock	436
Oax	Olearia axillaris	Coastal Daisy	4	Tubestock	436
Ppo	Poa poliformis	Tussock Grass	4	Tubestock	436
Rbc	Rhagodia baccata	Berry Saltbush	4	Tubestock	436
Scr	Scaevola crassifolia	Fan Flower	4	Tubestock	436
Snt	Scaevola nitida	Fan Flower	4	Tubestock	327
Tre	Templetonia retusa	Cockies Tounge	4	Tubestock	436

NOTES

ALL DRAWINGS TO BE READ IN COLOUR.

ALL COMPLETED WORKS TO BE PROTECTED AND MAKE GOOD ANY DAMAGE TO EXISTING WORKS CAUSED AS PART OF THIS CONTRACT. ALL WORK WITHIN DRIP LINES OF EXISTING TREES IS TO BE DONE BY HAND.

ALL SET OUT IS TO BE DONE BY A LICENSED SURVEYOR. THESE DRAWINGS WILL BE MADE AVAILABLE DIGITALLY TO THE SURVEYOR UPON REQUEST.

FIGURED DIMENSIONS SHALL TAKE PRECEDENCE OVER SCALED DIMENSIONS. INSETS AND DETAIL DRAWINGS TAKE PRECEDENCE & NOTIFY SUPERINTENDENT OF ANY IDENTIFIED DISCREPANCIES PRIOR TO UNDERTAKING WORK.

WHERE MIXED PLANTING IS PROPOSED PLANT IN GROUPS OF 3, 5 OR 7 OF THE SAME SPECIES.

CONTRACTOR TO ENSURE ALL PLANTS ARE ORDERED WITHIN 2 WEEKS OF CONTRACT AWARD.

CONTRACTOR TO ENSURE ALL PLANTING INSTALLATION OCCURS IN APRIL / MAY PRIOR TO WINTER RAINS TO ENSURE OPTIMAL ESTABLISHMENT PERIOD.

A QUALIFIED ARBORIST IS TO PRUNE EXISTING TREES WHERE BRANCHES OVERHANG THE ADJACENT ROAD RESERVE, IN ACCORDANCE WITH RELEVANT STANDARDS.

CLEARED VEGETATION IS TO BE RETAINED ON SITE WHERE PRACTICABLE FOR REUSE AS LOGS OR MULCHING, UNLESS OTHERWISE DIRECTED BY THE SUPERINTENDENT.

ALL PROPOSED SUBSTITUTIONS FOR SPECIFIED PRODUCTS ARE TO BE SUBMITTED BY THE CONTRACTOR DURING THE TENDER PROCESS FOR REVIEW AND APPROVAL BY THE SUPERINTENDENT.

CONTRACTOR WILL ENSURE ALL TREES TO BE REMOVED ARE INSPECTED PRIOR TO CLEARING BY LANDSCAPE ARCHITECT TO NOMINATE TREES TO BE KEPT AS SALVAGED LOGS FOR HABITAT OR TO BE MULCHED IN ACCORDANCE WITH AUSTRALIAN STANDARDS FOR REUSE ON SITE. ALL LOGS RETAINED WILL BE LOCATED ON THE DRAWINGS BY THE LANDSCAPE ARCHITECT ONCE NUMBERS AND QUALITY OF LOGS ARE CONFIRMED.

- LEGEND
- CADASTRAL BOUNDARY
 - LANDSCAPE WORKS EXTENTS
 - EXISTING TREE TO BE RETAINED AND PROTECTED IN ACCORDANCE WITH AUSTRALIAN STANDARD 4970-2009 FOR DURATION OF WORKS
 - + PROPOSED TREE, IRRIGATED
 - PLANTED AREA TYPE (A) WITH TOPSOIL AND 75MM DEPTH ORGANIC MULCH AS SPECIFIED, BORE AND PERMANENT IRRIGATION SYSTEM
 - PLANTED AREA TYPE (B) WITH TOPSOIL AND 75MM DEPTH ORGANIC MULCH AS SPECIFIED CONNECT TO TEMPORARY IRRIGATION SYSTEM
 - PLANTED AREA TYPE (C) BASIN INVERT PLANTING, UNMULCHED CONNECT TO TEMPORARY IRRIGATION SYSTEM
 - PLANTED AREA TYPE (D) REVEGETATION PLANTING WITH 25MM DEPTH ORGANIC MULCH AS SPECIFIED CONNECT TO TEMPORARY IRRIGATION SYSTEM
 - 75MM DEPTH ORGANIC MULCH SPREAD OVER SITE SOIL
 - 25MM DEPTH ORGANIC MULCH SPREAD OVER SITE SOIL

NOT FOR CONSTRUCTION

F	31/03/2026	100% DETAILED DESIGN
E	20/02/2026	90% UPDATED DESIGN
D	19/12/2025	90% DETAILED DESIGN
C	26/11/2025	COORDINATION ISSUE
B	31/10/2025	COORDINATION ISSUE
A	03/10/2025	CONCEPT

REV	DATE	ISSUE
ecoscape		
L1, 38 Adelaide Street, Fremantle (Walyup) WA 6160 (08) 9430 8955 www.ecoscape.com.au		
PROJECT NEERABUP RESOURCE RECOVERY PRECINCT		
CLIENT TAILS CONSULTANTS		PROJECT STAGE DETAILED DESIGN
DESIGNED FK	DRAWN DT	CHECKED FK
PROJECT No. 5133-25		ORG. SIZE A1
DRAWING TITLE PLANTING PLAN		
SCALE SCALE 1:250 @ A1		
DRAWING No. L1-1		

0 2.5 5 7.5 10 12.5 25m

ADJOINS SHEET L1-1

NOTES

ALL DRAWINGS TO BE READ IN COLOUR.

ALL COMPLETED WORKS TO BE PROTECTED AND MAKE GOOD ANY DAMAGE TO EXISTING WORKS CAUSED AS PART OF THIS CONTRACT. ALL WORK WITHIN DRIP LINES OF EXISTING TREES IS TO BE DONE BY HAND.

ALL SET OUT IS TO BE DONE BY A LICENSED SURVEYOR. THESE DRAWINGS WILL BE MADE AVAILABLE DIGITALLY TO THE SURVEYOR UPON REQUEST.

FIGURED DIMENSIONS SHALL TAKE PRECEDENCE OVER SCALED DIMENSIONS. INSETS AND DETAIL DRAWINGS TAKE PRECEDENCE & NOTIFY SUPERINTENDENT OF ANY IDENTIFIED DISCREPANCIES PRIOR TO UNDERTAKING WORK.

WHERE MIXED PLANTING IS PROPOSED PLANT IN GROUPS OF 3, 5 OR 7 OF THE SAME SPECIES.

CONTRACTOR TO ENSURE ALL PLANTS ARE ORDERED WITHIN 2 WEEKS OF CONTRACT AWARD.

CONTRACTOR TO ENSURE ALL PLANTING INSTALLATION OCCURS IN APRIL / MAY PRIOR TO WINTER RAINS TO ENSURE OPTIMAL ESTABLISHMENT PERIOD.

A QUALIFIED ARBORIST IS TO PRUNE EXISTING TREES WHERE BRANCHES OVERHANG THE ADJACENT ROAD RESERVE, IN ACCORDANCE WITH RELEVANT STANDARDS.

CLEARED VEGETATION IS TO BE RETAINED ON SITE WHERE PRACTICABLE FOR REUSE AS LOGS OR MULCHING, UNLESS OTHERWISE DIRECTED BY THE SUPERINTENDENT.

ALL PROPOSED SUBSTITUTIONS FOR SPECIFIED PRODUCTS ARE TO BE SUBMITTED BY THE CONTRACTOR DURING THE TENDER PROCESS FOR REVIEW AND APPROVAL BY THE SUPERINTENDENT.

CONTRACTOR WILL ENSURE ALL TREES TO BE REMOVED ARE INSPECTED PRIOR TO CLEARING BY LANDSCAPE ARCHITECT TO NOMINATE TREES TO BE KEPT AS SALVAGED LOGS FOR HABITAT OR TO BE MULCHED IN ACCORDANCE WITH AUSTRALIAN STANDARDS FOR REUSE ON SITE. ALL LOGS RETAINED WILL BE LOCATED ON THE DRAWINGS BY THE LANDSCAPE ARCHITECT ONCE NUMBERS AND QUALITY OF LOGS ARE CONFIRMED.

LEGEND

- CADASTRAL BOUNDARY
- LANDSCAPE WORKS EXTENTS
- EXISTING TREE TO BE RETAINED AND PROTECTED IN ACCORDANCE WITH AUSTRALIAN STANDARD 4970-2009 FOR DURATION OF WORKS
- ⊕ PROPOSED TREE, IRRIGATED
- PLANTED AREA TYPE (A) WITH TOPSOIL AND 75MM DEPTH ORGANIC MULCH AS SPECIFIED, BORE AND PERMANENT IRRIGATION SYSTEM
- PLANTED AREA TYPE (B) WITH TOPSOIL AND 75MM DEPTH ORGANIC MULCH AS SPECIFIED CONNECT TO TEMPORARY IRRIGATION SYSTEM
- PLANTED AREA TYPE (C) BASIN INVERT PLANTING, UNMULCHED CONNECT TO TEMPORARY IRRIGATION SYSTEM
- PLANTED AREA TYPE (D) REVEGETATION PLANTING WITH 25MM DEPTH ORGANIC MULCH AS SPECIFIED CONNECT TO TEMPORARY IRRIGATION SYSTEM
- 75MM DEPTH ORGANIC MULCH SPREAD OVER SITE SOIL
- 25MM DEPTH ORGANIC MULCH SPREAD OVER SITE SOIL

NOT FOR CONSTRUCTION

F	31/03/2026	100% DETAILED DESIGN
E	20/02/2026	90% UPDATED DESIGN
D	19/12/2025	90% DETAILED DESIGN
C	26/11/2025	COORDINATION ISSUE
B	31/10/2025	COORDINATION ISSUE
A	03/10/2025	CONCEPT

REV	DATE	ISSUE	NORTH 	
ecoscape				
L1, 36 Adelaide Street, Fremantle (Walyup) WA 6160 (08) 9430 8955 www.ecoscape.com.au				
PROJECT NEERABUP RESOURCE RECOVERY PRECINCT				
CLIENT TAILS CONSULTANTS		PROJECT STAGE DETAILED DESIGN		
DESIGNED FK	DRAWN DT	CHECKED FK	PROJECT No. 5133-25	ORG. SIZE A1
DRAWING TITLE PLANTING PLAN				

SCALE 1:250 @ A1

0 2.5 5 7.5 10 12.5 25m

L1-2

ADJOINS SHEET L1-3

TRANDOS ROAD

BUILDING
REUSE
SHOP


ADMIN

CUSTOMER
PARKING

SURFACE WATER
POND 2

COMMERCIAL ROAD

Plant Schedule					
Symbol	Botanical Name	Common Name	Spacing m2	Pot Size	Quantity
TREES					
Afl	<i>Agonis flexuosa</i>	WA Peppermint		45ltr	19
Afr	<i>Allocasuarina fraseriana</i>	Western Sheoak		45ltr	21
Ede	<i>Eucalyptus decipiens</i>	Limestone Marlock		45ltr	6
Efo	<i>Eucalyptus foecunda</i>	Narrow-leaved Red Mallee		45ltr	7
Ego	<i>Eucalyptus gomphocephala</i>	Tuart		45ltr	7
Ery	<i>Eucalyptus erythrocorys</i>	Red-capped Gum		45ltr	3
Eto	<i>Eucalyptus tottiana</i>	Coastal Blackbutt Pricklybark		45ltr	21
Ema	<i>Eucalyptus marginata</i>	Jarrah		45ltr	9
PLANTING MIX - BUSHLAND					
Ael	<i>Austrostipa elegantissima</i>	Feather Spear Grass	2	Tubestock	159
Ala	<i>Acacia lasiocarpa</i> 'prostrate'	Glow Wattle Prostrate	2	Tubestock	256
Bat	<i>Banksia attenuata</i> 'Dwarf'	Sandplain Banksia 'Dwarf'	2	Tubestock	159
Cqu	<i>Calothamnus quadrifidus prostratus</i>	Common Net Bush	2	Tubestock	256
Gco	<i>Gompholobium confertum</i>		2	Tubestock	213
Gcr	<i>Grevillea crithmifolia</i>	Grevillea	2	Tubestock	256
Gpr	<i>Grevillea preissii</i>	Spider Net Grevillea	2	Tubestock	213
Gth	<i>Grevillea thelemanniana</i>	Spider Net Grevillea	2	Tubestock	213
Jse	<i>Jacksonia sericea</i>	Waldjumi	2	Tubestock	159
Mse	<i>Melaleuca sericea</i>		2	Tubestock	213
Msy	<i>Melaleuca systena</i> 'prostrate'	Coastal Honeymyrtle 'prostrate'	2	Tubestock	256
Oai	<i>Olearia axillaris</i>	Coastal Daisy	2	Tubestock	213
Snd	<i>Scaevola nitida</i>	Fan Flower	2	Tubestock	213
Sth	<i>Scaevola thesioides</i>	Silky Scaevola	2	Tubestock	159
Wda	<i>Westringia dampieri</i>	Shore Westringia	2	Tubestock	213
PLANTING MIX - FLORAL					
Acu	<i>Adenanthos cuneatus</i>	Jug Flower	3	Tubestock	44
Ama	<i>Anigozanthos manglesii</i>	Red and Green Kangaroo Paw	3	Tubestock	421
Ber	<i>Bossiaea eriocarpa</i>	Common Brown Pea	3	Tubestock	44
Bni	<i>Banksia nivea</i>	Honeypot Dryandra	3	Tubestock	421
Cco	<i>Chorizema cordatum</i>	Heart Leaf Flame Pea	3	Tubestock	78
Cac	<i>Conostylis aculeata</i>	Prickly Conostylis	3	Tubestock	78
Dre	<i>Dianella revoluta</i> 'Little Rev'	Native Flax	3	Tubestock	637
Egl	<i>Eremophila glabra</i> 'Amber Carpet'	Eremophila 'Amber Carpet'	3	Tubestock	78
Gca	<i>Gastrolobium capitatum</i>	Bacon and Eggs	3	Tubestock	44
Hpu	<i>Hemiandra pungens</i>	Snakevine	3	Tubestock	386
Mtr	<i>Melaleuca trichophylla</i>	Pretty Honey Myrtle	3	Tubestock	44
Min	<i>Myoporum insulare</i>	Ground Cover Boobialla	3	Tubestock	377
Ola	<i>Orthrosanthus laxus</i>	Morning Iris	3	Tubestock	44
Omu	<i>Orthrosanthus multiflorus</i>	Morning Flag	3	Tubestock	44
Pfe	<i>Pimelea ferruginea</i>	Pink Rice Flower	3	Tubestock	44
Poc	<i>Patersonia occidentalis</i>	Native Iris	3	Tubestock	44
Rba	<i>Rhagodia baccata</i>	Berry Saltbush	3	Tubestock	44
San	<i>Scaevola anchusifolia</i>	Silky scaevola	3	Tubestock	44
PLANTING MIX - BROAD AREA					
Ac1	<i>Atriplex cinerea</i>	Saltbush	2	Tubestock	1376
Asa	<i>Acacia saligna</i> 'Green Mulch'	Green Mulch	2	Tubestock	1608
Bpr	<i>Banksia prionotes</i> 'Dwarf'	Acom banksia 'Dwarf'	2	Tubestock	1021
Cqa	<i>Calothamnus quadrifidus</i>	One Sided Bottlebrush Little Ripper	2	Tubestock	1376
Gob	<i>Grevillea obtusifolia</i>	Grevillea	2	Tubestock	1376
Hco	<i>Hardenbergia comptoniana</i>	Native Wisteria	2	Tubestock	1608
Kpr	<i>Kennedia prostrata</i>	Running postman	2	Tubestock	1608
Sna	<i>Scaevola nitida</i>	Scaevola 'Aussie Spirit'	2	Tubestock	1021
PLANTING MIX - BASIN					
Cvi	<i>Carpobrotus virescens</i>	Pig Face	4	Tubestock	545
Etr	<i>Enchylaena tomentosa</i>	Ruby Saltbush	4	Tubestock	327
Gcp	<i>Grevillea crithmifolia</i> 'prostrate'	Prostrate Grevillea	4	Tubestock	545
Lgl	<i>Lepidosperma gladiatum</i>	Sword Sedge	4	Tubestock	436
Mhu	<i>Melaleuca huegelii</i> 'prostrate'	Chenille Honeymyrtle 'prostrate'	4	Tubestock	436
Oax	<i>Olearia axillaris</i>	Coastal Daisy	4	Tubestock	436
Ppo	<i>Poa poliformis</i>	Tussock Grass	4	Tubestock	436
Rbc	<i>Rhagodia baccata</i>	Berry Saltbush	4	Tubestock	436
Scr	<i>Scaevola crassifolia</i>	Fan Flower	4	Tubestock	436
Snt	<i>Scaevola nitida</i>	Fan Flower	4	Tubestock	327
Tre	<i>Templetonia retusa</i>	Cookies Tounges	4	Tubestock	436

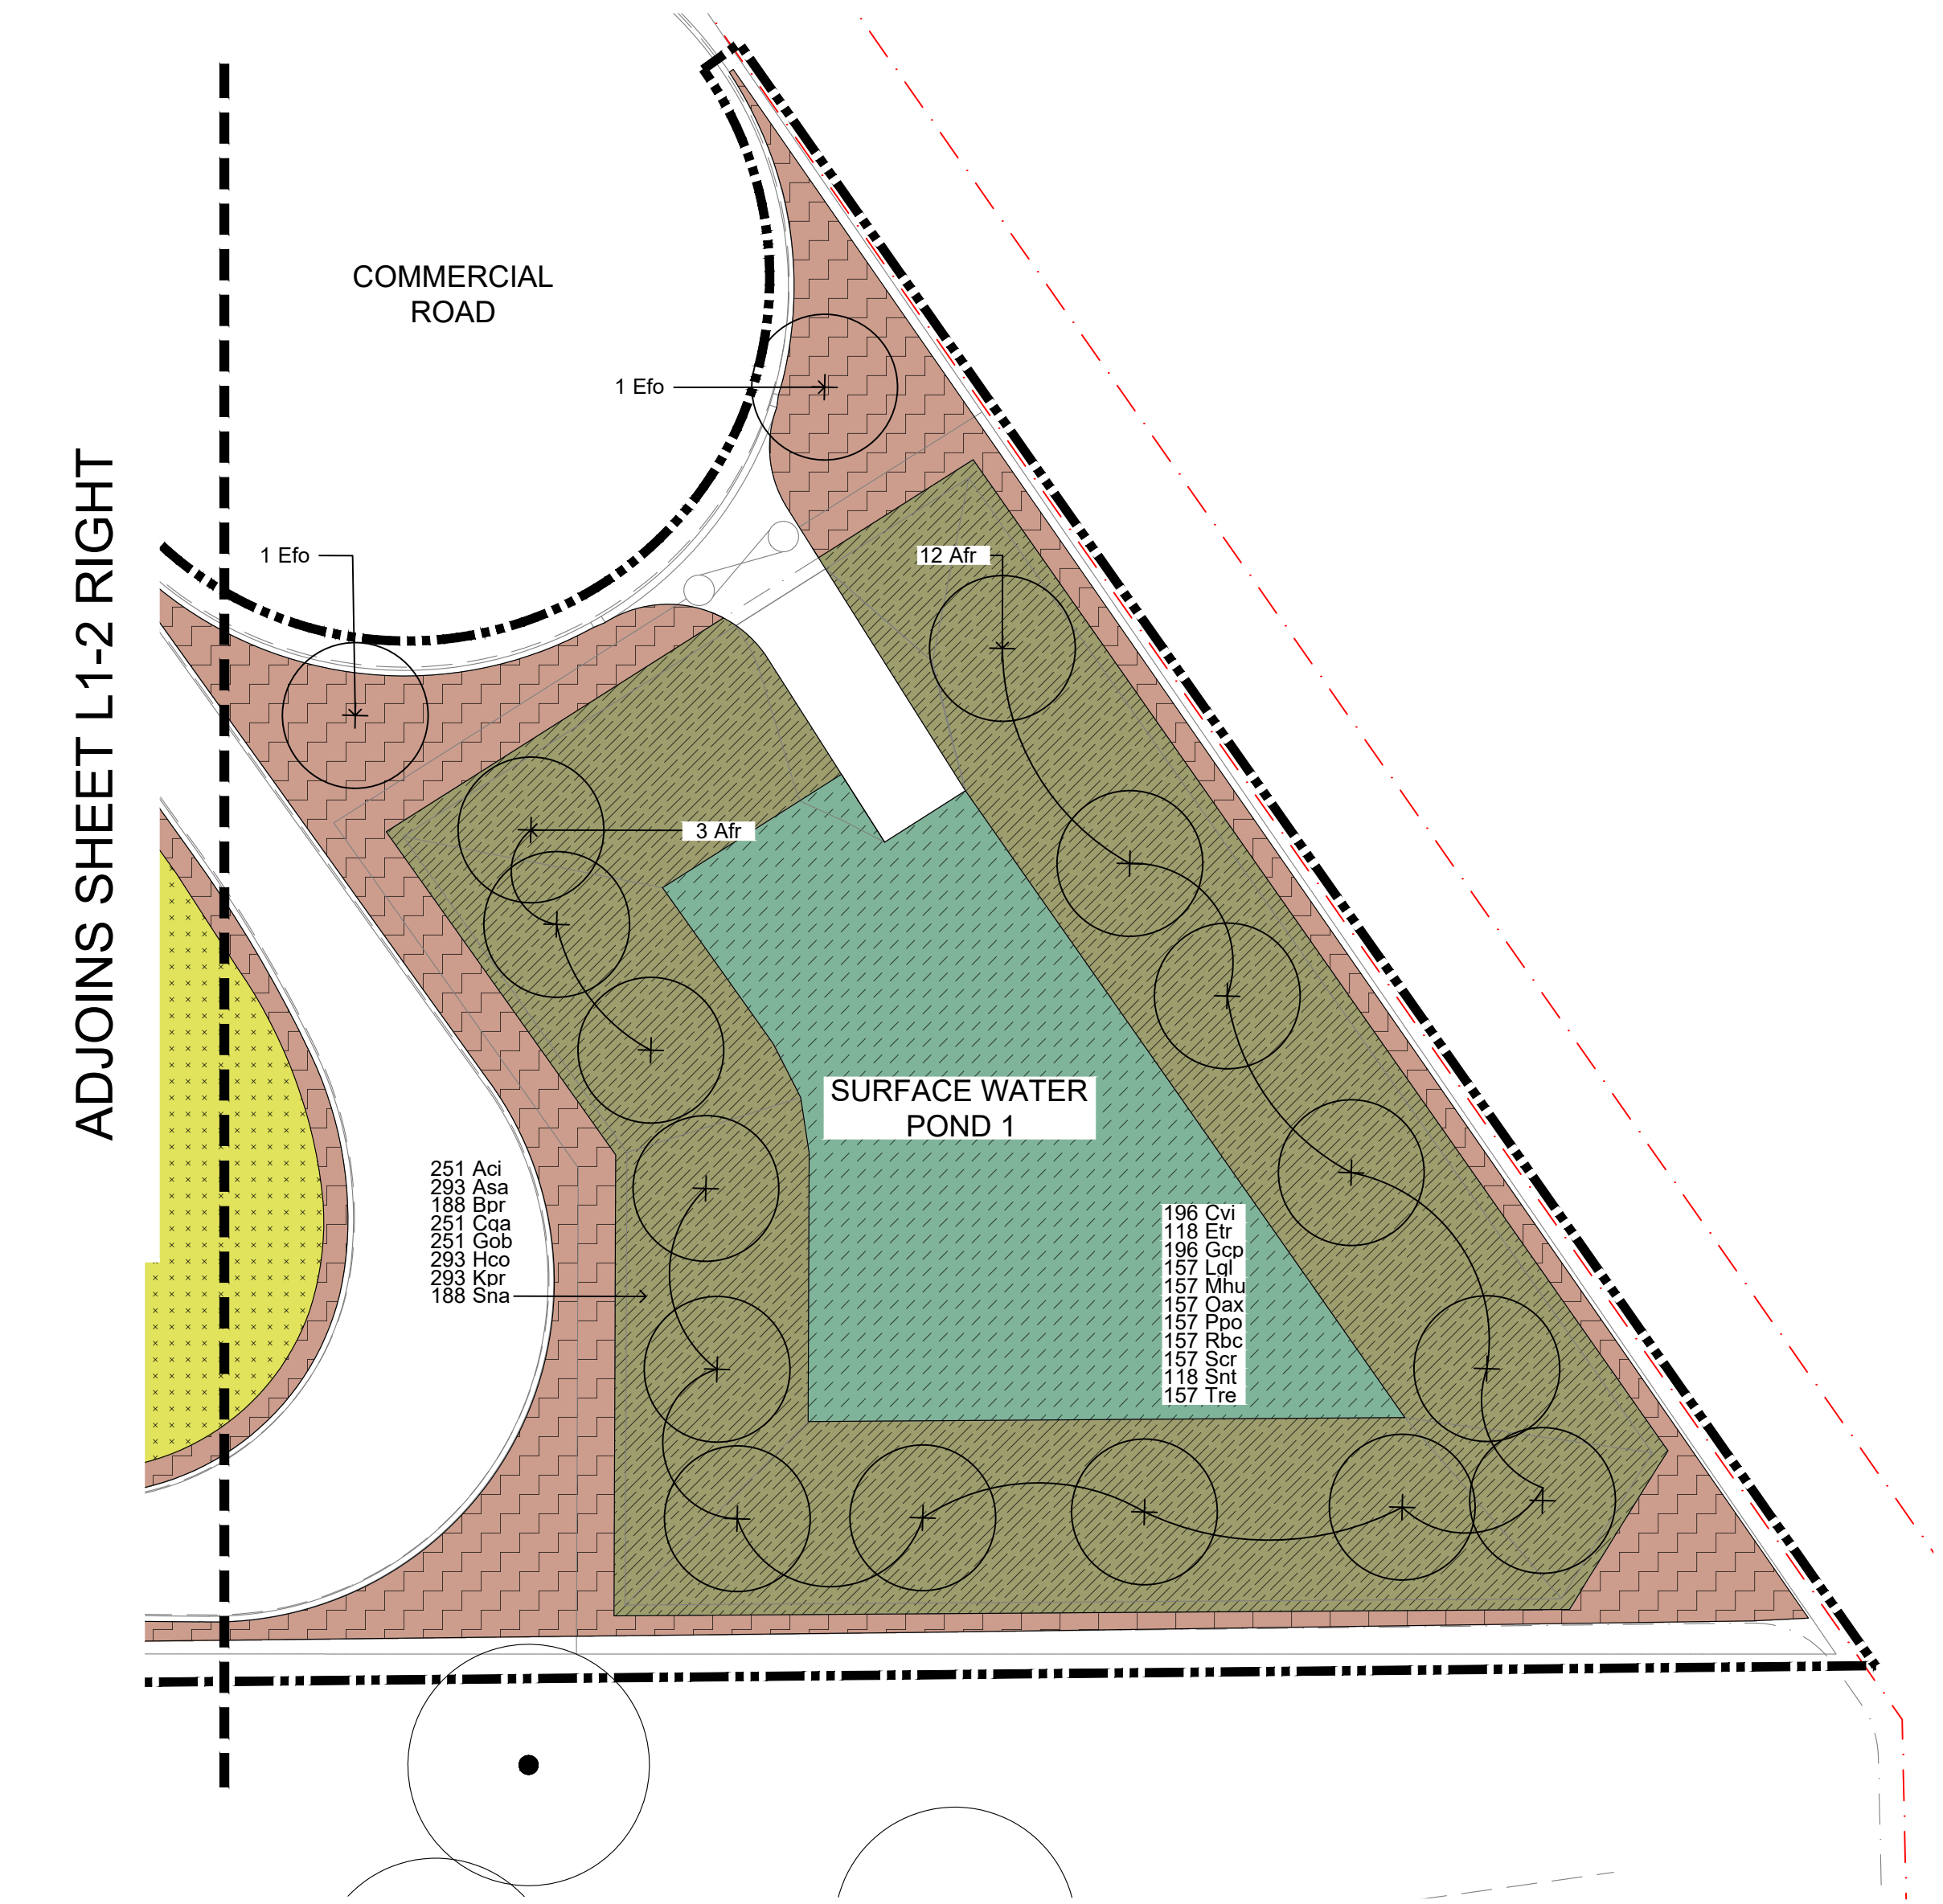

NOTES

ALL DRAWINGS TO BE READ IN COLOUR.

ALL COMPLETED WORKS TO BE PROTECTED AND MAKE GOOD ANY DAMAGE TO EXISTING WORKS CAUSED AS PART OF THIS CONTRACT. ALL WORK WITHIN DRIP LINES OF EXISTING TREES IS TO BE DONE BY HAND.

ALL SET OUT IS TO BE DONE BY A LICENSED SURVEYOR. THESE DRAWINGS WILL BE MADE AVAILABLE DIGITALLY TO THE SURVEYOR UPON REQUEST.

FIGURED DIMENSIONS SHALL TAKE PRECEDENCE OVER SCALED DIMENSIONS. INSETS AND DETAIL DRAWINGS TAKE PRECEDENCE & NOTIFY SUPERINTENDENT OF ANY IDENTIFIED DISCREPANCIES PRIOR TO UNDERTAKING WORK.

WHERE MIXED PLANTING IS PROPOSED PLANT IN GROUPS OF 3, 5 OR 7 OF THE SAME SPECIES.

CONTRACTOR TO ENSURE ALL PLANTS ARE ORDERED WITHIN 2 WEEKS OF CONTRACT AWARD.

CONTRACTOR TO ENSURE ALL PLANTING INSTALLATION OCCURS IN APRIL / MAY PRIOR TO WINTER RAINS TO ENSURE OPTIMAL ESTABLISHMENT PERIOD.

A QUALIFIED ARBORIST IS TO PRUNE EXISTING TREES WHERE BRANCHES OVERHANG THE ADJACENT ROAD RESERVE, IN ACCORDANCE WITH RELEVANT STANDARDS.

CLEARED VEGETATION IS TO BE RETAINED ON SITE WHERE PRACTICABLE FOR REUSE AS LOGS OR MULCHING, UNLESS OTHERWISE DIRECTED BY THE SUPERINTENDENT.

ALL PROPOSED SUBSTITUTIONS FOR SPECIFIED PRODUCTS ARE TO BE SUBMITTED BY THE CONTRACTOR DURING THE TENDER PROCESS FOR REVIEW AND APPROVAL BY THE SUPERINTENDENT.

CONTRACTOR WILL ENSURE ALL TREES TO BE REMOVED ARE INSPECTED PRIOR TO CLEARING BY LANDSCAPE ARCHITECT TO NOMINATE TREES TO BE KEPT AS SALVAGED LOGS FOR HABITAT OR TO BE MULCHED IN ACCORDANCE WITH AUSTRALIAN STANDARDS FOR REUSE ON SITE. ALL LOGS RETAINED WILL BE LOCATED ON THE DRAWINGS BY THE LANDSCAPE ARCHITECT ONCE NUMBERS AND QUALITY OF LOGS ARE CONFIRMED.

LEGEND

- CADASTRAL BOUNDARY
- LANDSCAPE WORKS EXTENTS
- EXISTING TREE TO BE RETAINED AND PROTECTED IN ACCORDANCE WITH AUSTRALIAN STANDARD 4970-2009 FOR DURATION OF WORKS
- PROPOSED TREE, IRRIGATED
- PLANTED AREA TYPE (A) WITH TOPSOIL AND 75MM DEPTH ORGANIC MULCH AS SPECIFIED, BORE AND PERMANENT IRRIGATION SYSTEM
- PLANTED AREA TYPE (B) WITH TOPSOIL AND 75MM DEPTH ORGANIC MULCH AS SPECIFIED CONNECT TO TEMPORARY IRRIGATION SYSTEM
- PLANTED AREA TYPE (C) BASIN INVERT PLANTING, UNMULCHED CONNECT TO TEMPORARY IRRIGATION SYSTEM
- PLANTED AREA TYPE (D) REVEGETATION PLANTING WITH 25MM DEPTH ORGANIC MULCH AS SPECIFIED CONNECT TO TEMPORARY IRRIGATION SYSTEM
- 75MM DEPTH ORGANIC MULCH SPREAD OVER SITE SOIL
- 25MM DEPTH ORGANIC MULCH SPREAD OVER SITE SOIL

NOT FOR CONSTRUCTION

REV	DATE	ISSUE
F	31/03/2026	100% DETAILED DESIGN
E	20/02/2026	90% UPDATED DESIGN
D	19/12/2025	90% DETAILED DESIGN
C	26/11/2025	COORDINATION ISSUE
B	31/10/2025	COORDINATION ISSUE
A	03/10/2025	CONCEPT

ecoscape

L1, 36 Adelaide Street, Fremantle (Walyup) WA 6160
(08) 9430 8955 www.ecoscape.com.au

PROJECT
NEERABUP RESOURCE RECOVERY PRECINCT

CLIENT	PROJECT STAGE
TAILS CONSULTANTS	DETAILED DESIGN


DESIGNED	DRAWN	CHECKED	PROJECT No.	ORG. SIZE
FK	DT	FK	5133-25	A1

DRAWING TITLE
PLANTING PLAN

SCALE 1:250 @ A1

L1-3

0 2.5 5 7.5 10 12.5 25m



NOT FOR CONSTRUCTION

F	31/03/2026	100% DETAILED DESIGN
E	20/02/2026	90% UPDATED DESIGN
D	19/12/2025	90% DETAILED DESIGN
C	26/11/2025	COORDINATION ISSUE
B	31/10/2025	COORDINATION ISSUE
A	03/10/2025	CONCEPT



DIAL BEFORE
DIGGING

www.1100.com.au

REV	DATE	ISSUE	NORTH 
			
(L1) 18 Adelaide Street, Fremantle (W Australia) WA 6160 (08) 9430 8955 www.ecoscape.com.au			
PROJECT NERERABUP RESOURCE RECOVERY PRECINCT			
CLIENT		PROJECT NAME	
TAILS CONSULTANTS		DETAILED DESIGN	
DESIGNED	DRAWN	CHECKED	PROJECT No.
FK	DT	FK	5133-25
DRAWING TITLE			A1
CONSTRUCTION DETAILS			

